

GatorCam Digital+

Radiodetection's advanced GatorCam2 compatible, digital command module



Operation Manual | Issue 1 | February 2008



Preface

Before you begin

Please read this user manual before attempting to use the GatorCam Digital+ system. Note that this manual and all its contents are subject to change. Radiodetection products are under continuous development.

Radiodetection Limited reserves the right to modify any product without notice and some product changes may have taken place after this user manual was published.

Contact your local Radiodetection dealer or visit www.radiodetection.com for the latest information about the GatorCam Digital+ product family, including all accessories, documentation and software.

Important safety notices

Please observe all safety notices in this manual before operating any Radiodetection product.

General

Radiodetection has taken care to provide the necessary information in this manual for the safe installation, operation, maintenance and disposal of this equipment. However, a risk assessment should be performed prior to commencing work as it may highlight additional safety issues specific to the application.

Installation

Cable reels are heavy. Where featured, use the cable reel wheels to assist transport. Observe heavy-lifting safety practices when lifting the reel.

The system is not earthed. If mains operated equipment is connected to the system then the external equipment must be earthed in accordance with the manufacturer's instructions. Failure to comply with this may cause the unit to become live and be a LETHAL HAZARD.

Operation

DO NOT USE the GatorCam Digital+ in potentially explosive environments. This equipment is NOT approved for use in areas where hazardous gases may be present.

Foul water systems can be a source of biological hazards. Wear appropriate protection when handling the GatorCam Digital+ command module and the push rod reel and camera.

The rod can retain a large amount of energy when coiled and can cause injury if not correctly handled. The risk of injury from the rotating reel increases with speed of rotation. Adjust the brake position to allow smooth deployment of the rod.

The camera will get hot during use. This is normal. Exercise care when handling the camera at all times.

Take care to ensure that video and power cables do not get entangled in the drum. Cables ties are recommended and will not impede system performance.

Always store the command module in a clean, dry environment.

Maintenance

Clean and sanitize the GatorCam Digital+ system at regular intervals and after conducting an inspection.

The GatorCam Digital+ system contains no user serviceable parts; do not dismantle any component of the GatorCam Digital+ system, including the command module, reel and camera.

Radiodetection recommends that only authorized service centers carry out service of this product. Service elsewhere will invalidate the manufacturer's warranty.

For information regarding any service needs, please visit www.radiodetection.com or contact your local Radiodetection representative or dealer.

Disposal

Do not dispose of this product in municipal waste facilities. Please check local regulations for disposal of electronic products.

* Radiodetection complies with the requirements of 2002/96/EC Waste Electrical and Electronic Equipment Directive.



Trademarks

GatorCam is a Trademark owned by Radiodetection Ltd., all rights reserved.

Bluetooth® is a trademark of the Bluetooth Special Interest Group, all rights reserved.

Windows and Windows Media Player are registered trademarks of Microsoft Corporation, all rights reserved.

Internet Explorer, and Microsoft Office are trademarks of Microsoft Corporation, all rights reserved.

QuickTime is a trademark of Apple Inc., all rights reserved.

Nero is a trademark of Nero AG Inc., all rights reserved.

VLC media player is an open-source project released under GNU licence agreement.

FlexiSight video encoder licence

Use of the images recorded with this equipment is permitted as supporting evidence of a professional survey or report. This product is licensed under the AVC Patent Portfolio License for the personal and non-commercial use of a consumer to (i) Encode video in compliance with the AVC standard ('AVC Video') and/or (ii) Decode AVC video that was encoded by a consumer engaged in a personal and non-commercial activity and/or was obtained from a video provider licensed to provide AVC video. No license is granted or shall be implied for any other use. Additional Information may be obtained from MPEG LA, L.L.C. See <http://www.mpegla.com>

Copyright statement

This manual is Copyright © 2007 Radiodetection Limited, all rights reserved. Radiodetection Ltd. is a subsidiary of SPX Corporation.

Training

Radiodetection provides training services for most Radiodetection products. Our qualified instructors will train equipment operators or other personnel at your preferred location or at Radiodetection headquarters.

For more information go to www.radiodetection.com or contact your local Radiodetection representative.

Declaration of Conformity

We: **Radiodetection Limited**
Western Drive
Bristol
BS14 0AF

Declare that the products listed below satisfy the essential requirements of the following Council Directives:

- 2004/108/EC, relating to Electromagnetic Compatibility. (EMC)
- 2006/95/EC, relating to Electrical Equipment within certain voltage limits (LVD)

GatorCam Digital + Modular CCTV inspection system

Part Number
10/RP2968

Description
GatorCam Digital+

The following standards have been used in the evaluation

BS EN 61000-6-4: 2001	Generic standards. Electromagnetic compatibility (EMC). Emission standard for industrial environments.
BS EN 61010-1: 2001	Safety requirements for electrical equipment for measurement control and laboratory use.

The Technical Construction File has been drawn up to demonstrate compliance with the essential requirements of these Directives and is kept at the above address

Signed



Kevin Lench
(Marketing and Engineering Director)

Date: 4/12/2007

Radiodetection Ltd
Western Drive
Bristol BS14 0AF, UK
Tel: +44 (0) 117 976 7776
Fax: +44 (0) 117 976 7775
email: sales.uk@radiodetection.spx.com
<http://www.radiodetection.com>



Radiodetection

Certificate No. RD / DoC1119e rev1

Declaration of Conformity

We: Radiodetection Limited
Western Drive
Bristol
BS14 0AF

Declare that the products listed below satisfy the essential requirements of the following Council Directives:

- 2004/108/EC, relating to Electromagnetic Compatibility. (EMC)
- 2006/95/EC, relating to Electrical Equipment within certain voltage limits (LVD)
- 1999/5/EC, Radio & Telecommunications Terminal Equipment Directive

GatorCam Digital + Modular CCTV inspection system with Embedded *Bluetooth™* Serial Module

Part Number	Description
10/RP2968 + BT	GatorCam Digital+ with <i>Bluetooth™</i>

The following standards have been used in the evaluation

BS EN 61000-6-4: 2001	Generic standards. Electromagnetic compatibility (EMC). Emission standard for industrial environments.
BS EN 61010-1: 2001	Safety requirements for electrical equipment for measurement control and laboratory use.

The Technical Construction File has been drawn up to demonstrate compliance with the essential requirements of these Directives and is kept at the above address

Signed



Kevin Lench
(Marketing and Engineering Director)

Date: 4/12/2007

Radiodetection Ltd
Western Drive
Bristol BS14 0AF, UK
Tel: +44 (0) 117 976 7776
Fax: +44 (0) 117 976 7775
email: sales.uk@radiodetection.spx.com
<http://www.radiodetection.com>



Radiodetection

Certificate No. RD / DoC1119f rev1

Table of Contents

Preface	i	Section 6 – Compact Flash card	11
Maintenance	i	6.1 Supported card types	11
Disposal	i	6.2 Card status	11
Section 1 – Introduction	1	6.3 Formatting the card	12
1.1 About this manual	1	6.4 Managing files and directories	12
1.2 Overview	1	6.4.1 Organizing your work	12
1.2.1 GatorCam Digital+ features	1	6.4.2 File name structure	12
1.3 Safety notices	1	6.4.3 To navigate the file browser	12
1.4 System components	2	6.4.4 Copying files	13
1.4.1 Command Module	2	6.4.5 Moving Files	13
1.4.2 Keypad	3	6.4.6 Renaming Files	13
1.4.3 Accessories (not shown):	3	6.4.7 Deleting files and folders	13
Section 2 – Quick start guide	4	6.4.8 Creating directories	14
2.1 Quick start procedure	4	6.4.9 Sending files via Bluetooth®	14
Section 3 – System setup	5	6.4.10 Viewing JPEG files	14
3.1 Cable reel	5	Section 7 – USB connection	15
3.2 Power lead	5	Section 8 – Bluetooth	16
3.3 Restore factory settings	5	8.1 Pairing	16
3.4 Battery pack	5	8.2 Transferring files	16
3.5 System configuration	5	Section 9 – Editing Text	17
3.5.1 Powering the system	6	9.1 Editing text pages	17
3.5.2 To set length units and Reel Type	6	9.2 Editing text with the keypad	17
3.5.3 To set the Date and Time	6	Section 10 – Digital video	18
3.5.4 To set the Keyboard	6	10.1 Video specification	18
3.5.5 To set the Language	6	10.2 Video quality settings	18
3.6 Splash and information screens	6	10.2.1 Predefined settings	18
3.6.1 Splash screens	6	10.2.2 Advanced quality settings	19
3.6.2 Information screens	6	10.3 Advanced video options	19
3.7 Company details	7	10.3.1 INPUT	20
Section 4 – Calibration and deployment	8	10.3.2 DESTN	20
4.1 Calibration	8	10.3.3 FNAME	20
4.2 Deploying the camera	8	10.3.4 TITLE	20
4.2.1 Zero the Rod Counter	8	10.4 Recording video	21
4.3 Retrieving the camera	8	10.5 Video playback	21
Section 5 – Menu system	9	10.6 Capturing frames	21
5.1 General navigation	9		
5.2 Menu map	9		
5.2.1 SETUP menu	9		
5.2.2 CARD menu	10		
5.2.3 DVR menu	10		
5.2.4 SCRN menu	10		
5.2.5 TEXT menu	10		
5.2.6 SONDE menu	10		

Section 11 – Inspection reports

11.1	Overview	
11.2	Report writing	
11.2.1	Creating new reports	
11.2.2	Client details	
11.2.3	Company details	
11.2.4	Observations	
11.2.5	Photos	
11.2.6	Freetext	
11.2.7	Site	
11.2.8	Survey	
11.3	Editing and deleting reports	
11.4	Viewing reports	
11.4.1	Folder structure	
11.5	Exporting to Word	
11.5.1	Conversion requirements	
11.5.2	Conversion overview	

Section 12 – Appendix

12.1	Keyboard short cuts	
12.2	Care and maintenance	
12.2.1	Changing the camera	
12.2.2	Cleaning the system	
12.2.3	Rod seals	
12.2.4	Storing the system	
12.3	Firmware upgrades	
12.4	Clamp assembly	
12.5	Creating DVDs	
12.5.1	Standalone DVD writer	
12.5.2	PC DVD Writer	
12.6	Specifications	
12.6.1	Controller	
12.6.2	Standards	

22 Table of Figures

22	Figure 1.1: Command module	2
22	Figure 1.2: Command module rear view	2
22	Figure 1.3: Connection plate enlarged	2
22	Figure 2.1: Command module installed on push rod reel.	4
23	Figure 3.1: Welcome screen	7
23	Figure 3.2: Company details menu	7
23	Figure 3.3: Editing company details	7
23	Figure 5.1: Main screen with top-level menu	9
23	Figure 6.1: Compact Flash warning	11
24	Figure 6.2: card status window.	11
24	Figure 6.3: Compact Flash browser	12
24	Figure 6.4: File Browser delete functions	13
25	Figure 7.1: Windows USB manager	15
25	Figure 8.1: Bluetooth® menu	16
26	Figure 9.1: Text editing	17
27	Figure 10.1: DVR settings menu	18
27	Table 10.1: Video Quality profiles	19
27	Figure 10.2: Advanced video settings menu	19
27	Figure 10.3: Video title page	20
27	Figure 11.1: Report pages	22
27	Figure 11.3: Report navigation	25
27	Figure 11.4: FlexiSight report select box	26
28	Figure 12.2: Push rod clamp exploded	28
28	Figure 12.3: Installed push rod clamp	28
29		
29		
29		
30		
30		
30		

Section 1 – Introduction

1.1 About this manual

This manual provides pipeline inspectors with comprehensive operating instructions for the GatorCam Digital+ pipeline video inspection system. Before attempting to operate the GatorCam Digital+ system it is very important that you read this manual, noting all safety warnings and procedures.

NOTE: Please refer to your original GatorCam2 user manual where appropriate. This manual covers the operation of the GatorCam Digital+ command module.

The rest of this section introduces the GatorCam Digital+ system and includes annotated illustrations of the command module, keypad and lists accessories.

Section 2 includes a quick reference guide that provides step-by-step instructions from start up to managing a new video recording.

Section 3 introduces system setup procedures and Section 4 introduces the concept of reel calibration and camera deployment.

Section 5 provides a detailed overview of the command module menu system.

Section 6 introduces the Compact Flash card browser and provides a detailed explanation for managing files.

Section 7 introduces file transfer from the command module to PC using the supplied USB cable.

Section 8 introduces the optional *Bluetooth®* module that enables transfer files to your computer or mobile phone using *Bluetooth®* wireless technology.

Section 9 introduces text editing using the keyboard and keypad.

Section 10 provides a comprehensive guide to video playback and recording and adjusting advanced quality settings.

Section 11 introduces the report writing function and show you how to view reports or convert them to Microsoft® Word format.

Section 12 is an appendix that includes reference information.

1.2 Overview

The GatorCam Digital+ is an advanced pipeline video inspection system that is ideal for a broad range of residential and commercial applications. This system allows operators to identify and document pipeline faults.

1.2.1 GatorCam Digital+ features

One Touch recording using industry standard H.264 video and AAC audio format.

Record up to 1 hour and 45 minutes of high-quality video with a 2 gigabyte Compact Flash card. For more information about video recording settings, please refer to Section 10.

NOTE: Recording length for a given file size is not fixed and depends on a large number of factors including, among other things, the live picture that is being recorded. Constant movement in the camera's focus, for example, will produce larger file sizes per minute of recorded footage. The unit can record up to 9 hours using the low quality setting.

Pan, zoom and rotate live video or your recordings.

Still image capturing using industry-standard jpeg format.

Integrated reporting. Reports are generated by the GatorCam Digital+ command module in HTML compatible with Internet Explorer 6.0 or higher format and can be converted by FlexiSight into a Microsoft Word document, providing you have Microsoft Office 97 or higher installed.

1.3 Safety notices

Caution must be taken when conducting any pipeline or drainage system inspection. Please observe all safety warnings located in the Preface and throughout the manual.

Before operating the GatorCam Digital+ system, it is recommended that you familiarize yourself with any additional health and safety requirements that may be defined by company policy and any applicable local or national laws. Contact your company's or local government's health and safety officer for more information.

1.4 System components

The GatorCam Digital+ pipeline inspection system comprises of a command module, cable reel and camera. This subsection provides a detailed, illustrated overview of these components.

1.4.1 Command Module

See Figures 1.1 to 1.3.

1. On/Off Switch.
2. Keypad and function keys: Allows the operator to select functions and edit text entries.
3. Keyboard: Provides enhanced text entry capabilities and short-cuts to access system functions.
4. Display: LCD Screen shows image and various on-screen information including deployed rod length, operator generated titles, time and date.
5. Link Cable Socket (at rear of unit): To connect the cable reel to the command module with the link cable.
6. Fuse Holder: Integral surge type fuse (3.15A).
7. RCA Video Jacks: Allows an external composite video source to be displayed by the GatorCam Digital+ unit or recorded onto Compact Flash. GatorCam Digital+ video can also be displayed or recorded on an external device.
8. Power Socket: DC power input from vehicle supply, battery box or mains adapter.
9. Compact Flash card slot: A Compact Flash card is used to store video recordings and later playback on the command module or PC. Also used for firmware upgrades.
10. Keyboard Socket: Standard PS/2 keyboard connector (only the supplied Cherry keyboard is supported).
11. Audio Socket: Connect the supplied headset to record or hear voiceovers for your videos.
12. USB-B socket. USB connection to allow file transfers.

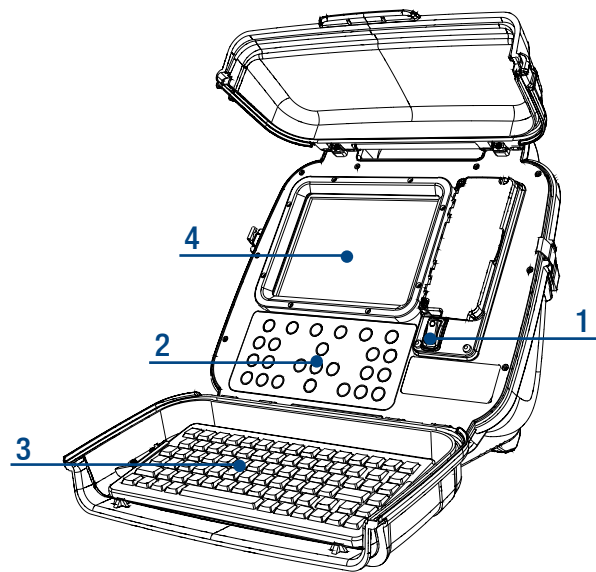


Figure 1.1: Command module

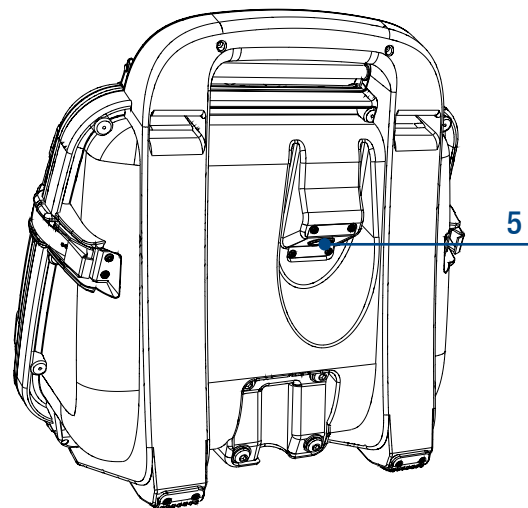


Figure 1.2: Command module rear view


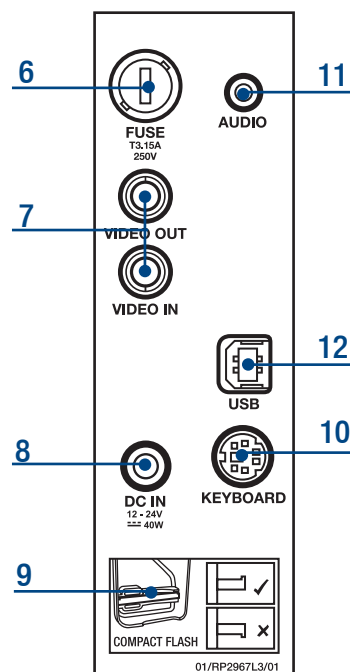


Figure 1.3: Connection plate enlarged

1.4.2 Keypad

1. Functions Keys: use to select menu items or activate short cuts.
2. Camera key: press to take screen captures and store them as jpeg files on the Compact Flash.
3. Text key: press to toggle on-screen text and display the Text menu.
4. Video play: press to start video playback and enter the card browser menu.
5. Pause: press to pause video playback or recording.
6. Record: press to begin a new video recording.
7. Stop: press to stop video playback or recording.
8. Tractor stop: not functional on this model.
9. Arrow keys: use to navigate the command module's menu options.
10. OK: press to select or confirm choices in the menu system.
11. LED Brightness: press to adjust the brightness level of the camera lights. Fn press to focus camera (not function on this model).
12. Rotate/Pan keys: press to rotate the camera view. Fn + Rotate to pan left or right. Simultaneous press will reset the view.
13. Zoom/Iris keys: press to zoom in or out of the camera's subject. Fn + Zoom to modify the Iris (not functional on this model). Simultaneous press will reset the view.
14. Function key: press and hold to activate different functions.

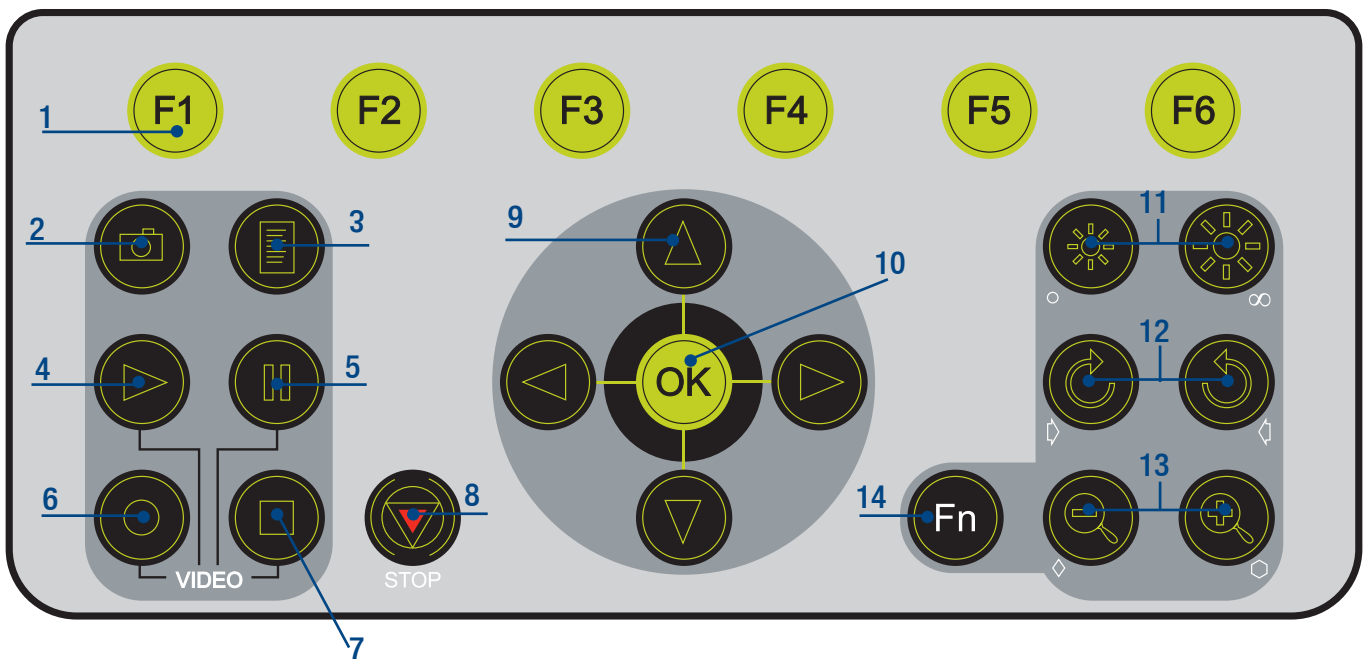

1.4.3 Accessories (not shown):

- Car adapter: connect the command module to your vehicle's power supply.
- Mains Adapter: Waterproof (IP67) mains power supply.
- Battery Pack: Optional battery pack to allow the use of the system where mains power is not available.
- USB Lead: USB A to B lead.
- Head Set: Allow the user to add or review audio commentary.
- Compact Flash card.
- Adaptor Clamp (optional): Allows the command module to be mounted onto the cable reel.

Section 2–Quick start guide

This section provides users with quick start instructions to operating the GatorCam Digital+ command module. Note this section is intended as a reference for experienced users; first time users should read this manual in its entirety before proceeding.

2.1 Quick start procedure

- Install the module on top of the reel if desired.
- Using the link cable, connect the reel to the connector on the rear of the command module.
- Ensure a compatible Compact Flash card is loaded into the command module.
- Connect the power supply to the command module.
- Switch the command module on. There is a delay of several seconds before the splash and welcome screens appear.
- Press OK to clear the welcome screen.
- Calibrate the reel and zero the camera's position. Press F10 on the keyboard or \triangle and ∇ on the keypad simultaneously.
- Deploy the camera into the pipe as required.
- If required, zero the camera's position by pressing F10 on the keyboard or press the \triangle and ∇ on the keypad simultaneously.
- Press the \odot or \otimes keys to adjust the camera light brightness.
- On the keypad, press the \bigcirc button to begin recording.
- Press the \square icon to take screen captures.
- Press the ≡ icon then press F1 to annotate your video or to create a report.
- To pause a recording press || .
- To stop a recording, press the \square key.

WARNING!

Do not remove the Compact Flash card or switch the module off during recording or playback. Doing so may corrupt all data on the card and crash the command module.



Figure 2.1: Command module installed on push rod reel.

Section 3–System setup

This section describes the procedures used for to set up the GatorCam Digital+ for the first time. Unless indicated otherwise, most of the procedures do not need to be repeated unless the module is reset to factory settings.

3.1 Cable reel

Connect the link cable on the cable reel to the socket on the command module. Tighten the connectors finger-tight but do not use a wrench, spanner or pliers.

3.2 Power lead

WARNING!

The command module is not earthed. If any mains operated equipment is connected to the system, the external equipment MUST BE earthed in accordance with the manufacturer's instructions. Failure to earth the attached equipment may result in potentially lethal electric shock.

1. Release the side catches and open the two halves of the cover,
2. Open the connection panel cover,
3. Connect the power supply (12 to 24V DC vehicle supply, mains adaptor or optional battery pack) to the power socket.

WARNING!

Only use the supplied mains adapter; using other adapters may damage the system.

3.3 Restore factory settings

You can restore the command module to factory settings. Note that doing this will erase all your settings, personal preferences and your company details so proceed with caution.

To reset the command module:

1. Enter the SETUP menu,
2. Select the RSTOR option,
3. Confirm your choice by selecting YES or press NO to cancel.

3.4 Battery pack

A fully charged GatorCam Digital+ 12Ah battery pack will typically power the system for 8 hours; the 7Ah battery pack will power the system for 4 hours. To use the battery pack, connect the power lead to the command module as you would with other power sources. Ensure that the power connector lead is kept clean and dry at all times. Cover the power lead connector on the box when it is not in use.

Do not keep the battery pack fully discharged for more than 8 hours. This will degrade battery life. Keep the battery regularly charged.

WARNING!

Use only the supplied battery pack charger or the optional in-vehicle charger.

Protect the charger against high relative humidity and water. Do not attempt to open the charger.

Do not use the charger for charging other batteries. Failure to comply may cause personal injury and damage to equipment.

Do not obstruct or tamper with the vent hole.

Do not drop the battery pack.

The GatorCam Digital+ battery pack contains lead-acid batteries. Contact your local Radiodetection representative for instruction on correct removal of the batteries. Follow local regulations for correct disposal of the battery box.

3.5 System configuration

Before you begin your first survey, you must configure the system settings to suit your preferences. Once the command module is configured, you do not need to repeat the process unless you reset the system to its factory settings.

To navigate the on-screen menu, use the function and arrow keys on the keypad or keyboard. The left arrow key on the keypad will return you to the previous screen;

press this key several times and you will return to the top-level menu. Once you reach the top-level menu, pressing the left arrow will cause the menu to flash, indicating that you can't go higher.

For more information about the menu system refer to Section 5.

3.5.1 Powering the system

1. Attach the reel to the command module and ensure the rod is correctly layered.
2. Make sure that the external power supply is on.
3. Switch the command module on.
4. Press OK on the keypad or Enter on the keyboard to acknowledge the welcome screen.

NOTE: The command module takes approximately 10 seconds to load the welcome screen.

When the command module is switched ON with no camera connected, the screen will display several vertical color bars.

The caption CAL will flash on the top right-hand corner of the screen until you calibrate the reel.

You may now proceed to the next step.

3.5.2 To set length units and Reel Type

To set the length unit go to the UNITS menu (SETUP → DEVICE → REEL → UNITS) and choose the measurement system you wish to use.

Next, from the UNITS menu, press the left arrow to go back to the REEL menu and select the RSIZE option. Use the \triangle and ∇ arrows to select the correct rod length and press OK to accept the change.

Press F10 or press the \triangle and ∇ on the keypad simultaneously to calibrate the selected reel.

NOTE: Ensure that the correct reel and rod length are selected as this will affect counter accuracy and picture quality.

3.5.3 To set the Date and Time

To set the time, go to the Time menu (SETUP → DEVICE → CONTR → TIME) and type in the correct time using the keyboard. Press OK or Enter to accept the change.

To set the date, go to the Date menu (SETUP → DEVICE → CONTR → DATE), select D-M-Y or M-D-Y and type in the correct date. Press OK or Enter to accept the change.

3.5.4 To set the Keyboard

Go to the KEYBD menu (SETUP → DEVICE → CONTR → KEYBD) and use the \triangle and ∇ arrows to select your keyboard. Press OK to confirm your choice. **NOTE** This setting is not necessary as the keyboard is already configured.

3.5.5 To set the Language

To change the command module's language settings go to the LANG menu (SETUP → DEVICE → CONTR → LANG) and use the \triangle and ∇ arrows to select your preferred language. Press OK to confirm your choice.

3.6 Splash and information screens

The GatorCam Digital+ features several splash and information screens.

3.6.1 Splash screens

The GatorCam Digital+ command module displays two splash screens at start up. The first is the Radiodetection splash screen. This screen is fixed and will appear whenever the command module powers up.

The second splash screen is optional and it allows you to set your own company logo as the second splash screen.

To set your own splash screen:

1. Create your splash screen in your picture editor of choice,
2. Save the file as 'splash.jpg',
3. Copy the splash.jpg file to the root directory of the Compact Flash card.

You can copy the file using a Compact Flash card reader or by connecting the command module to your computer using USB. For more information see Section 7.

NOTE: the vertical and horizontal dimensions of your splash screen jpeg must be divisible by 16.

3.6.2 Information screens

Information screens provide important warnings and rapid access to system-critical information. The first and most obvious information screen is the welcome screen that appears after the splash screens when the command module is powered up. The welcome screen is illustrated in Figure 3.1


```

04-12-07 11:05
Reel 331-30m
CompactFlash: 1949MB (1883MB free)
Company: Radiodetection
Crew: Inspection
Press Up+Down or F10 to calibrate
Press OK to continue

```

Figure 3.1: Welcome screen

The welcome screen includes the following information:

- Date and time at start up
- Reel type
- Compact Flash card size and free space
- Company as defined in the Company Details menu (See Section 3.7)
- Crew as defined in the Company Details menu (See Section 3.7)

The Welcome Screen also features a note reminding you to calibrate the reel by pressing Up and Down or F10.

To clear the Welcome Screen, press OK or Enter.

Other information screens include:

- Compact Flash access warning screen.
- Compact Flash status screen (see Section 6.2).

3.7 Company details

The GatorCam Digital+ allows you to store your company details on the command module. When stored, your company details are then placed automatically in reports and on the optional video title screen (refer to Section 10.3.4).

Once this information is recorded you will not need to repeat the process and each report will include this information by default.

To set your company details:

1. On the command module open the Company Information menu (SETUP -> CMPNY). This menu is illustrated by Figure 3.2
2. To edit a field, press the \triangle and ∇ arrows

to select the field you want to edit and then press OK.

3. Type in the correct details and press OK or Enter to save.
4. Repeat step 3 for each field until all the information is complete.

The logo field allows you to select a small (32KB) jpeg file from the root of the compact flash card to be used as company logo in the report generated.

NOTE: The company details page will remain unchanged, even after rebooting the command module. Resetting the command module to factory settings (see Section 3.8) will delete report's company data. If you reset the module, you must re-enter your company information before creating a new report.

```

< Company Information >
Logo          <defined>
» Company     Radiodetection
Crew          Inspection
Street        Western Drive
City          Bristol
Postcode      BS4 3EN
Phone         01179767776
Fax           01179767775
Email         info@spx.com
CLEAR

```

Figure 3.2: Company details menu

```

< Available fields >
ComLogo
» ComName
ComCrew
ComStreet
ComCity
ComPostCode
ComTelephone
ComFax
ComEmail
-----
Radiodetection

```

Figure 3.3: Editing company details

Section 4–Calibration and deployment

This section introduces the user to basic operation of the GatorCam Digital+ system. Note in particular the reel calibration procedure, which must be completed every time the system is used. Failure to calibrate the rod counter may lead to inaccurate readings.

4.1 Calibration

The push rod reel must be calibrated every time the command module is switched on and connected to a reel. Calibrating the rod counter is different to simply zeroing the rod counter.

Before calibrating first ensure that the rod is layered correctly onto the reel and the end is leveled with the rod guide. Once the rod is correctly wound, use the following procedure to calibrate the reel.

Calibration procedure:

1. Connect the command module to a power source,
2. Switch the command module on,
3. Note the welcome screen,
4. Press OK on the keypad to continue,
5. Immediately calibrate and zero the camera's position by pressing F10 on the keyboard or \triangle and ∇ on the keypad simultaneously,
6. Once calibrated and zeroed the flashing 'CAL' caption changes to '0.0m' or '0ft'.

4.2 Deploying the camera

To deploy the camera, first release the brake gently and rotate the reel. When a sufficient amount of cable is free, insert the camera rod into the pipe. Push the rod into the pipe by hand and rotate the reel if you need more cable length.

NOTE: Radiodetection recommends adjusting the brake slowly to prevent excessive free movement of the reel. Adjust the brake lever by pulling out and turning.

4.2.1 Zero the Rod Counter

Zero the counter to provide accurate location results in your pictures, videos and reports. When the rod is in the desired start position:

1. Press F10 on the Keyboard or \triangle and ∇ arrows on the keypad simultaneously,
2. Make sure that the counter changes to 0.0m or 0ft.

NOTE: The rod counter can be reset to zero at any time. The original distance cannot be recalled once the counter is reset.

4.3 Retrieving the camera

Once you complete the inspection, wind the reel to retrieve the camera from the pipe.

WARNING!

Foul water systems can be a source of biological hazards. Maintain high sanitary standards at all times. Clean the system after each inspection with a cloth soaked in a suitable disinfectant.

Always wear appropriate protection when conducting an inspection and when handling the GatorCam Digital+ system.

1. Release the brake.
2. Layer the rod onto the reel by a combination of rotating the reel and pushing the rod onto the reel. Do not simply rotate the reel.

NOTE: Make sure that the rod is evenly layered onto the reel or the counter may give inaccurate readings.

3. Clean the rod and camera as required.

Section 5 – Menu system

The command module features an intuitive on-screen menu system that provides users with access to all features and settings. The menu is organized in hierarchical layers. The top-level menu provides links to submenus, similar in concept of a DVD player's settings menu.

5.1 General navigation

Figure 5.1 illustrates the main page with the menu highlighted in black at the bottom of the screen. The figure shows the top-level menu. To navigate the menu, use the function and arrow keys on the keypad or keyboard. The left arrow key on the keypad will return you to the previous screen; press this key several times and you will return to the top-level menu. Once you reach the top-level menu, pressing the left arrow will cause the menu to flash, indicating that you can't go higher.

If the menu disappears from the screen, then press any Function key to return to the last viewed menu option.

Where a selection is required use the \triangle or ∇ arrow keys to cycle through the options in that menu screen. Use the OK key (or Enter on the keyboard) to confirm the selected choice.

NOTE: You can also use the keyboard's Function, ESC, Enter and cursor keys to navigate and select option in the menu.

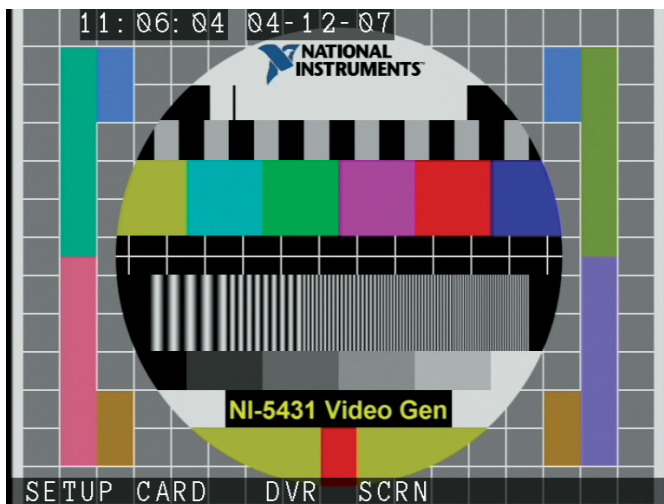


Figure 5.1: Main screen with top-level menu

5.2 Menu map

This menu map provides a complete, annotated overview of the GatorCam Digital+ menu system.

5.2.1 SETUP menu

Accesses settings options for the command module and the camera reel.

Following is a list of submenus under the SETUP menu with a brief description where appropriate.

DEVCE: Device settings

- CONTR: edit control module settings.
- TIME: set the time.
- DATE: set the date and date format.
- KEYBD: select keyboard layout for your language and location.
- LANG: set the system language.
- UPDTE: perform a firmware upgrade and activate features in future releases.
- REEL: edit push rod reel settings.
- UNITS: sets the reel measurements.
- RSIZE: select the correct reel size.

OSD: On Screen Display settings

- TIME: toggle time on and off.
- DATE: toggle date on and off.
- MENU: toggle menu timeout.
- COLOR: set menu font color.
- TRANS: set menu bar transparency.
- BACKG: set browser background color.

COMMS: Communication settings

This menu manages *Bluetooth*® wireless connections. See Section 8.

CMPNY: Company Details

Edit your company's contact details for inclusion in reports and video titles. See Section 3.7.

5.2.2 CARD menu

Access the Compact Flash card file browser and perform format or diagnostic functions. See Section 6 for more information.

Following is a list of submenus under the CARD menu with a brief description where appropriate.

- DESTN: set destination folder for new recordings.
- REPOR:
 - NEW: creates a new report and prompts you to name the report.
 - EDIT: loads the selected report for editing.
 - DEL: deletes the selected report.
- CHECK: checks the Compact Flash card and displays important card information.
- FMT: formats the card.

5.2.3 DVR menu

The DVR menu allows you to configure the digital video recording settings. See Section 10 for more information.


Following is a list of submenus under the DVR menu with a brief description where appropriate.

- INPUT: select video source.
- DESTN: select a destination directory for the recordings.
 - NEW: creates a new directory.
 - SET: set the selected directory as the default destination.
- FNAME: add a prefix to the file name.
- TITLE: toggle title page on video recordings.
- QUAL: adjust video recording quality.

5.2.4 SCRn menu

Adjusts the screen brightness and contrast.

5.2.5 TEXT menu

The TEXT menu is accessed by pressing the  key on the keypad.

Following is a list of submenus under the TEXT menu with a brief description where appropriate.

- EDIT: edits the selected on-screen text entry.
- REPOR:
 - NEW: creates a new report and prompts you to name the report.
 - EDIT: loads the selected report for editing.
 - DEL: deletes the selected report.
- COLOR: short cut to font color.
- TRANS: short cut to font transparency.

5.2.6 SONDE menu

The SONDE menu allows you to enable the integral sonde and adjust the frequency if required.

Following is a list of submenus under the SONDE menu with a brief description where appropriate.

- POWER: switches the sonde on or off
- CANCEL: returns to the previous screen.

Note: Press **Fn + F5** on the keypad to toggle the sonde on/off shortcut.

When the sonde is powered, press up and down on the keypad to adjust the frequency.

Frequencies includes:

- 512Hz
- 640Hz
- 8.192kHz
- 32.768kHz

NOTE: Some sonde frequencies may not be available in your country or region.

Locating a sonde

Once the sonde is enable and the frequency set, you can locate the sonde using a compatible cable locator such as the Radiodetection SuperC.A.T™.

Refer to the SuperC.A.T user guide for information on how to locate the sonde.

Section 6–Compact Flash card

The GatorCam Digital+ uses a Compact Flash card to store all video, images, and report files. A 2 gigabyte card will store up to 1 hour 45 minutes of recorded video using the high-quality video setting (refer to Section 10 for more information about video quality and recording times).

6.1 Supported card types

The GatorCam Digital+ supports high-speed (40x with a minimum write speed requirement of 6MB/sec), Type 1 Compact Flash cards with a capacity of up to 8 gigabytes. For the best results, only use cards that have been formatted by the GatorCam Digital+ command module.

NOTE: Radiodetection recommends using only quality, high-speed certified cards. 40 Speed (40x) Compact Flash cards are the minimum requirement for high quality video recordings. Examples include:

- San Disk Ultra II
- Kingston Elite Pro
- Integral i-Pro
- Lexar Professional

Using low speed or generic cards may degrade video recording quality or cause the recording to hang or render the system unstable.

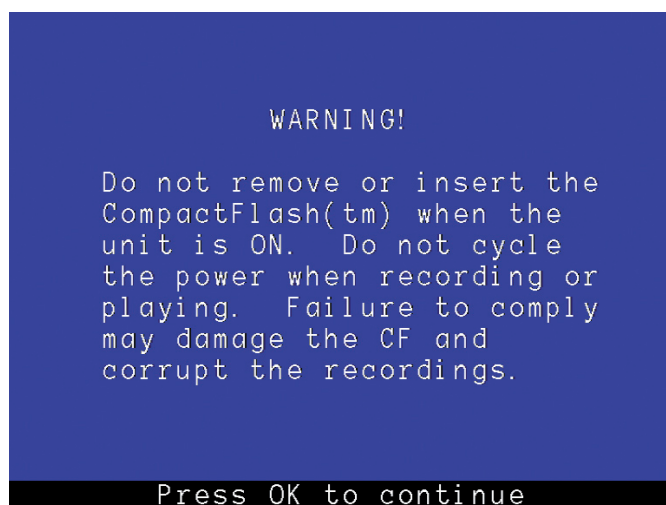


Figure 6.1: Compact Flash warning

6.2 Card status

The Compact Flash card status window displays critical information about the state of the currently installed card. The status screen is displayed after the command module performs a series of tests to check the card's memory.

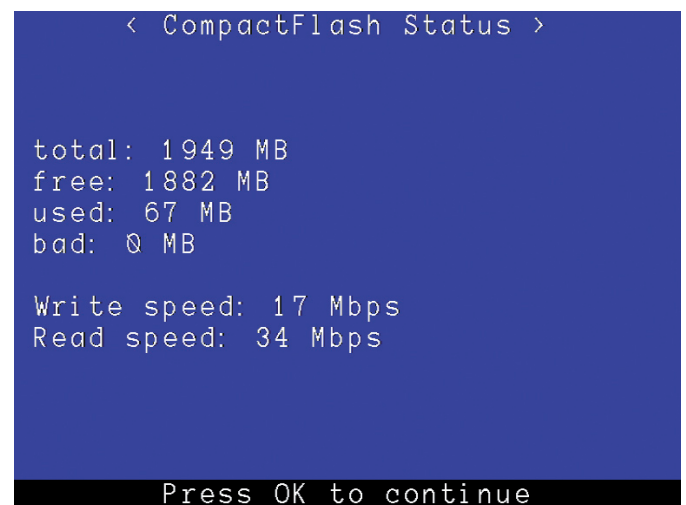


Figure 6.2: card status window.

NOTE: Format the Compact Flash Card if any bad sectors are found. If the bad sector persists after formatting replace the Compact Flash card.

To check your card, select the CARD menu and then select the CHECK option. This system will prompt you to wait and then display the card status window (Figure 6.2)

6.3 Formatting the card

The command module can format your Compact Flash card. If you purchase a new Compact Flash card, be sure to format it using the command module rather than your PC or digital camera.

WARNING!

Formatting the card will erase all existing data permanently; this includes reports, photos and videos. Formatting cannot be undone so proceed with caution!

To format the card:

1. Select Card from the Main Menu,
2. Read the warning and Press OK to Continue,
3. Select FMT,
4. The screen will display a warning message; press Yes to format the card or No to cancel.

6.4 Managing files and directories

The GatorCam Digital+ system features a basic file manager (Figure 6.3) that allows you to create, edit and delete files and directories. In addition, you can also set the default destination directory for any new video, photo or report file.

NOTE: By convention, this manual refers to computer folders as directories. You can view directories created by the GatorCam Digital+ in Windows Explorer when you connect the command module to your computer.

WARNING!

The GatorCam Digital+ file browser will only show supported file types. These are video files (MP4) and jpeg (JPG) pictures. HTML files are visible but cannot be viewed.

```
< File browser >
1949MB total, 1882MB free
/DVC/04Dec
» [..]
  04Dec001.MP4
  04Dec002.MP4
  04Dec003.JPG

COPY  MOVE  RENAM  DIR  SEND
```

6.4.1 Organizing your work

The command module automatically creates a new default directory in the [DVC] folder at the start of each day's operation. The directory is named after the day it was created, for example [30Nov].

Once created, the new directory will serve as the default location for all new videos, images and reports. If you prefer to organize each inspection job in a different directory, you can do this by manually setting a new or existing directory as the new default directory (see Section 10.3.2).

6.4.2 File name structure

By default, each video or picture file is created by the command module according to the following structure:

- ddmxxx.ext

In the example, dd is the day number, mmm is the month, xxx is a counter and ext is the file extension (MP4 or JPG).

You can customize file names by adding a prefix to it. Refer to Section 10.3.2.

6.4.3 To navigate the file browser





1. Select the Card menu or press the video  button on the keypad.
2. The command module will list any directories on the Compact Flash card for example [05Nov]. Directories are indicated by [square brackets].
3. The current location in the folder structure is shown below the Card Status line, for example /DVC indicates that your current position is in the Compact Flash card's DVC directory. The / refers to the Compact Flash card's top level or root directory.
4. To enter a directory, select it with the  and  arrows and press OK or Enter.
5. The screen will now display any sub-directories and files located in the directory you selected.
6. To return to the parent directory press the left keypad arrow or select the [..] icon and press OK or Enter.
7. To select multiple files or folders navigate to these and press the  key to select it. Note that a * will appear to indicate that the item is selected.
8. If required select +ALL or -ALL to select or deselect all files and directories included in the current directory.

Figure 6.3: Compact Flash browser

6.4.4 Copying files

You can copy any file to the current directory or to a different directory.

To copy a file:

1. Highlight the file you wish to copy using the \triangle and ∇ arrows,
2. Select the COPY option,
3. Navigate to the directory where you want to copy the file to and select the SEL option.

NOTE: The command module will automatically provide a default copy name for example Copy_of_05Nov03.JPG. Once the file is copied, you can rename it as required.

6.4.5 Moving Files

You can move any file to another directory.

To move a file:

1. Highlight the file using the \triangle and ∇ arrows,
2. Select the MOVE option,
3. Navigate to the directory where you want to move the file to and select the SEL option.

6.4.6 Renaming Files

You can rename any file or directory in the Compact Flash card; note that the system will add the correct extension by default.

WARNING!

Do not rename any report file as this will corrupt the report and will inhibit the report conversion by FlexiSight.

To rename a file or directory:

1. Highlight the file or directory using the Up and Down arrows,
2. Select the RENAM option,
3. Type the new file name and press OK or Enter.

6.4.7 Deleting files and folders

You can delete any file and directory. Note, however, that once a file or directory is deleted it cannot be retrieved so proceed with caution!

Figure 6.3 illustrates the delete functions in the File Browser.

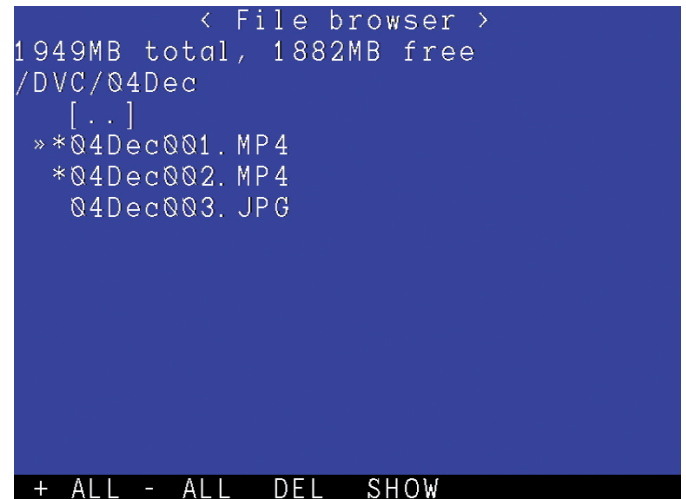


Figure 6.4: File Browser delete functions

To delete files and directories:

1. Highlight the file or directory using the Up and Down arrows,
2. Select each file or directory by pressing the \triangleright arrow
3. Alternatively, to select all files and sub-directories select the + ALL option,
4. Select the DEL option,
5. Confirm or cancel the deletion.

6.4.8 Creating directories

You can create new directories in any location of the Compact Flash card.

To create a new directory:

1. Navigate to the directory where you want to create the new subdirectory,
2. Select the DIR option,
3. Type over the default name and press OK or Enter to create the directory.

Once the directory is created you can move or copy files to it as with any directory on the card or set it as new default working directory.











6.4.9 Sending files via *Bluetooth*[®]

The file browser allows you to send a selected file by using the SEND option on the menu bar. For more information about *Bluetooth*[®] please refer to Section 8.

6.4.10 Viewing JPEG files

The file browser allows you to view supported file types, namely jpeg images and mpeg4 video files, generated by the GatorCam Digital+ system. See Section 10.5 for video playback options.

To view a JPEG file:

1. Highlight the file using the  or  arrows,
2. Press OK or Enter to display the picture,
3. Press  or  to return to the file browser or press the  or  arrows to navigate all the pictures in the directory.
4. If required, select the SEND option to transfer the file wirelessly to an external device using *Bluetooth*[®]
5. You can also view all pictures in the directory as a slideshow
 - a. Select SSHOW,
 - b. Choose your preferred transition time,
 - c. Press OK to start the show,
 - d. Press  or  to end the slide shop.
6. You can also select multiple pictures to browse and select SHOW to display. In show mode, use the  and  arrows to cycle through the images.

NOTE: Jpeg pictures created by third-part equipment or software may not work depending on the compression type used. Compatible pictures will only be displayed providing that the horizontal and vertical pixel dimensions are multiples of 16. For example a picture with the dimensions 480x320 will be displayed as each dimension is divisible by 16.

Section 7 – USB connection

The command module supports USB 2.0, allowing high speed file transfers. USB is the recommended method for transferring files from the command module to your PC.

To connect via USB to a PC running Windows XP:

1. Switch the command module off.
2. Ensure your computer is switched on and running.
3. Connect the supplied USB cable to the unit and to your computer.
4. Your computer will recognize the unit as a Mass Storage Device.
5. In Windows Explorer go to My Computer and open the device.
6. Open the DVC folder to retrieve your inspection files.

WARNING!

Only use the supplied USB cable to connect the command module to your computer.

When connected to your computer, ensure the command module is switched off for the duration of the connection.

Connect the USB cable directly to your computer's USB port, do not use third-party USB hubs.

Disconnecting from a PC running Windows XP

To disconnect the command module from your computer you must use the Windows USB hub manager before removing the cable.

1. Locate the USB device icon on the Windows Task Bar (usually bottom right-hand corner of the screen).
2. Double-click the icon.
3. Select the USB MASS STORAGE DEVICE (See Figure 7.1).
4. Press STOP.
5. A balloon popup will inform you that it is safe to remove your hardware.
6. You can now disconnect the USB cable from the computer and command module.

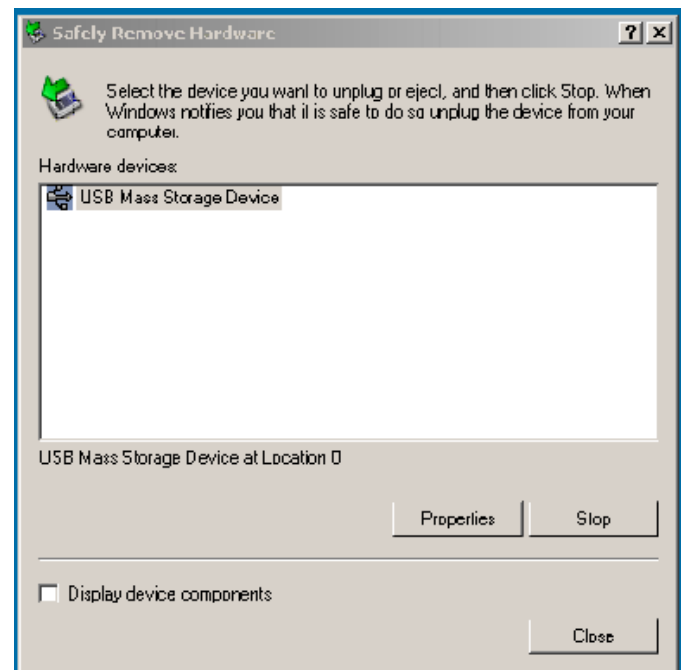


Figure 7.1: Windows USB manager

Section 8–Bluetooth

The GatorCam Digital+ features an optional *Bluetooth*® module that allows users to transfer files wirelessly between the GatorCam Digital+ and any compatible *Bluetooth*® device such as a computer or mobile phone.

NOTE: If *Bluetooth*® is not installed and you attempt to use a *Bluetooth*® function, the command module will display a notice stating the feature is not available. If you wish to upgrade then please contact your local Radiodetection representative.

8.1 Pairing

Bluetooth® devices must be paired before file transfer can take place. You can pair the command module to any compatible *Bluetooth*® laptop or mobile phone.

To pair your device:

1. Enter the SETUP menu,
2. Enter the COMMS menu,
3. The command module will attempt to locate any nearby paired *Bluetooth*® devices.
4. Select SCAN to connect to your device. Repeat this step if you cannot see your device.
5. Note if you still can't see your device in the list, check that your device's *Bluetooth*® module is on and set to visible and re-scan. Refer to your device's manual for more information on *Bluetooth*® pairing.
6. Select your device and press PAIR,
7. When you begin the pairing process, your device will ask you to accept to cancel the request to pair.
8. Your device will then ask you to enter a security key: type **12345** and press OK.

Your device is now paired.



Figure 8.1: *Bluetooth*® menu

8.2 Transferring files

You can transfer any file on the card. Due to the limited bandwidth supported by *Bluetooth*® it is recommended that you send photos only. To transfer video files, Radiodetection recommends using the USB connection.

To transfer a file using *Bluetooth*®:


1. Highlight the file in the card browser and then select Send.
2. The command module display a list of nearby paired devices. If your device is listed, highlight it using the \triangle and ∇ arrows.
3. If your device is not listed, check that it is correctly paired and visible and then:
 - a. Select SCAN to locate all nearby *Bluetooth*® enabled devices or
 - b. Select KNOWN to locate all paired devices within range
4. Press OK to send the file.

NOTE: *Bluetooth*® devices such as computers and mobile phones will handle received files differently. Some devices may ask you to specify the location of the received file while some will automatically receive and save the file into a default location. Consult your *Bluetooth*® enabled device's user documentation for more information.



Section 9 – Editing Text

The GatorCam Digital+ command module allows the user to add text annotation to the live video as this is recorded. You can save and edit up to ten text pages.

9.1 Editing text pages

To add or edit text annotation to the video, press  button. This toggles page text on and off the screen and displays the Text menu.





NOTE: Recordings are paused when you toggle text on-screen and the text will appear on the live video. Text is also saved to captured jpeg photos (see Section 10.6)

Use the  or  arrows to cycle through the pages.

Press EDIT to modify the text currently displayed and use the keyboard or keypad to type your text.

The keyboard is fully featured; you can enter any available character and use navigation keys such as Home, End and the arrow keys to position the cursor.

9.2 Editing text with the keypad

You can enter text with the keypad arrows. In any text-editing screen, use the  or  arrows to cycle through available characters. Use the  and  arrows to move the text cursor backwards and forwards along the line.

Use the CAPS option to toggle between upper and lower case characters.

To delete all text to the left of the cursor, select the DEL< option.

To delete all text to the right of the cursor, select the DEL> option.

Select CANCL or press Esc on the keyboard to undo your changes and exit the edit function.

Press OK or Enter to save your text; remember to re-start the recording if in pause.



Figure 9.1: Text editing

Section 10–Digital video

The GatorCam Digital+ incorporates an advanced digital video recorder. This section provides an overview of the GatorCam Digital+ digital video recording and playback capabilities.

10.1 Video specification

The GatorCam Digital+ system produces the latest generation MPEG4 layer 10 videos (also known as H.264) encoded with AAC audio.

The resulting MP4 files can be transferred and played on any compatible computer providing the correct video and audio codecs are installed.

FlexiSight automatically installs the correct codecs on your Windows XP computer.

NOTE: By default, Microsoft Windows Media Player®, does not include the correct codecs. Applications like Apple QuickTime for Windows or VLC Media player (both programs are freely available on the internet) will play the files without installing Windows compatible codecs.

WARNING!

Installing third party H.264 and AAC codecs on your PC may affect the performance and usability of FlexiSight.

10.2 Video quality settings

The GatorCam Digital+ can record video using several predefined quality settings. The system also allows you to configure video quality setting as required.

10.2.1 Predefined settings

The GatorCam Digital+ includes three predefined video quality settings. Video quality is set using the DVR Record Settings menu.



Figure 10.1: DVR settings menu

To select a predefined quality setting:

1. From the top-level menu enter the DVR submenu,
2. Select QUAL and then choose High, Medium or Low quality video as required.

The table below provides an overview of the predefined video quality settings.

Table 10.1: Video Quality profiles

Property	Video Quality Profiles			
	High quality	Medium quality	Low quality	Custom
Frame size	VGA	VGA	QVGA	user defined
Bitrate	High	Medium	Low	user defined
Encoding	Progressive full	Progressive full	Progressive full	user defined
Frame rate	Maximum (full)	Maximum (full)	Maximum (full)	user defined
Recording Time hrs*	1:45	3:45**	9:00**	varies

*Approximate recording time based on a 2GB Compact Flash Card

** Recordings exceeding 2 hours are split in multiple files

10.2.2 Advanced quality settings

In most circumstances, the predefined quality profiles are sufficient. However, you can define your own custom quality settings to suit your recording requirement. To adjust the video quality settings select the ADV option under the DVR quality menu (Figure 10.1, previous page).

The Advanced Recording menu allows you to set the Frame Size, Bitrate, Encoding and the Frame Rate.

Frame size: This option selects the pixel size of the recorded video. Your options are:

- Full: Pal or NTSC depending on your camera,
- VGA: 640x480 pixels,
- QVGA: Quarter VGA, 320x240 pixels.

BRATE: sets the bitrate (memory usage in Mb per second of recording). Select between High, Medium and Low.

ENC: sets the encoding. Select between Progressive Full, Progressive Half or Interlaced.

Frame Rate: sets the amount of frames per second. Select between:

- Maximum (30FPS for NTSC and 24FPS for PAL)
- Medium (20FPS)
- Minimum (10FPS)

NOTE: Bitrate is the only parameter that will affect your recording size. The higher the bitrate, the better the resulting video will be and the larger the file size.

10.3 Advanced video options

The GatorCam Digital+ features several advanced video settings. You can, for example, change the default destination and file names for recorded videos. You can also choose to include a title page on the start of each video.

Advanced video options are available in the DVR options menu, which you can access by pressing F3 on from the top-level menu.



Figure 10.2: Advanced video settings menu

10.3.1 INPUT

The Input menu (DVR -> INPUT) allows you to set the video source for your recording. The default setting is Auto.

- The **Auto** setting will automatically select the recording device attached to the command module on startup giving preference to the camera input if an external video source is connected.
- The **Camera** setting selects the camera reel as the default recording device.
- The **External** setting selects any connected external composite video source as the video input source. You can connect external video sources using a standard composite RCA cable. These cables are often used to connect VCRs and DVDs to domestic television units.

The video input jack is located inside the command module's interface panel and is highlighted with a yellow ring around the jack.

10.3.2 DESTN

The destination menu (DVR -> DESTN) allows you to set the default destination directory for new video recordings.

To set the destination:

1. Navigate to the destination menu,
2. Highlight the directory you wish to use and select SET,
3. Alternatively, you can create a new directory by selecting NEW. Type the new directory name and press OK on the keypad or Enter

NOTE: An error message is displayed if a directory with the name already exists.

10.3.3 FNAME

The File Name menu (DVR -> FNAME) allows you to customize video and picture file names by appending a prefix to new files. To create a file name prefix, enter the FNAME menu and type the prefix.

New files will have the following structure:

- prefixddmmmmxxx.ext

For example: Crew112Nov001.MP4.

10.3.4 TITLE

You can insert a short title at the beginning of your recording that highlights key company information.



Figure 10.3: Video title page

To enable video titles:

1. Select the Title menu (DVR -> TITLE).
2. Press \triangle and ∇ to toggle the option.
3. Press OK to confirm your choice.

The title page includes the following information:

- company name,
- crew name,
- date,
- and the reel type used.

The company and crew name are taken from your company details stored in the GatorCam Digital+. See Section 3.7 for more information.

10.4 Recording video




Recording video is simple. First ensure you have setup the GatorCam Digital+ command module and camera reel according to the setup guide in Section 3.


To begin recording press the  button. A red circle will indicate that recording has begun.




WARNING!



Do not remove the Compact Flash card or switch the command module off during the recording process. Doing so may corrupt all data on the card and crash the command module.

Use the headset to record an audio commentary while you conduct the inspection.

To pause a recording, press the  button. Press the  or  button to resume your recording.

To end the recording, press the  button on the keypad or press ESC on the keyboard.

To enter text, press the  button and use the  and  arrows to select the page you want to edit then select EDIT.

Type the text using the keyboard or using the  and  arrows and press OK to finish.

NOTE: Recordings are automatically limited to a maximum of approximately 2 hours. Recordings that exceed 2 hours will be split into multiple files.



Video recording is paused during text editing.

Radiodetection recommends limiting recordings to a maximum of 30 minutes to optimize video post-processing on a PC.

10.5 Video playback

You can playback recorded video and view it on the GatorCam Digital+ LCD screen or any external monitor connected to the video out socket.



To playback a video:



1. Press the video  button to enter the Card menu.
2. Highlight the file you wish to play using the UP and DOWN arrows
3. Press the video  button.
4. Playback will begin immediately and a white triangle symbol will appear on the top bar.
5. During playback, you can adjust the volume at any time by selecting the VOL- and VOL+ options.

NOTE: The playback OSD will timeout after a few seconds. Press any function key to reload the OSD.

WARNING!

Do not remove the Compact Flash card or switch the command module off during the playback process. Doing so may corrupt all data on the card and crash the command module.


You can pause or stop playback at any time using the  or  buttons.

To cue the video (Fast-Forward and Rewind) press the left and right arrows on the keypad during playback. To stop cuing the video, press  and then press video  to resume normal playback speed.

Once the video has finished, video playback will end and the screen will return to the card browser.

10.6 Capturing frames

During video playback or recording it is possible to capture video frames as jpeg photos. You can then use these photos as part of your report or as a general photographic record of your survey.

To take a screen shot, press the  button (please note that playback or recording will pause whilst the picture is saved onto the Compact Flash card).

The screen will display a Please Wait message recording or playback will resume automatically after the image is saved.

NOTE: The picture taken will display exactly what is on screen including any digital enhancements such as zoom, pan or rotate. OSD text is not saved.

Section 11 – Inspection reports

This section introduces the GatorCam Digital+ command module's integrated report writer.

11.1 Overview

The GatorCam Digital+ system features an integrated report writer that allows you to create inspection reports on site using the command module. The report contains your company and client details, observations, comments and selected photos captured with the GatorCam Digital+ camera.

Reports are generated in HTML format and are compatible with Internet Explorer 6 or later. Reports can be viewed or printed on any compatible PC by accessing the report folder on the Compact Flash card. The report can be given directly to the customer or converted into Microsoft Word (Office 97 or later) for further editing.

NOTE: The GatorCam Digital+ command module cannot display a report in its final format. It can however display individual text entries that you can edit using the supplied keyboard.

11.2 Report writing


11.2.1 Creating new reports

1. Enter the Report menu (REPOR),

NOTE: Creating a new report will pause any recording in progress.

2. Select NEW,
3. Type the report's name and press OK or Enter,
4. The system will generate a blank report using the name you specified as the report's directory.

NOTE: By default, the command module will save the new report in the default working directory, for example: /DVC/29Nov/MyReport where MyReport is the name you specified when you created the report and 29Nov is the default directory.

Once created, the command module will present you with seven editable pages inside the report's data directory. You can toggle between the report editor and live video at any time by pressing the  key.

```
< File browser >
1949MB total, 1882MB free
/DVC/04Dec/report/data
» client
  company
  freetext
  observations
  photos
  site
  survey
```

Figure 11.1: Report pages

11.2.2 Client details

This page allows you to enter details about your client. You can enter the client's name, contact details and specify a reference if required. The client details appear on the Report Details page of the generated report.

Client details fields

ClientName: client's company name or personal name if the client is an individual.

ClientRef: reference number for the client.

ClientContact: name of the client's representative if applicable.

ClientPosition: contact's position: for example manager, landlord or tenant.

ClientAddress: client's business address if different from the Site address (see Section 11.2.7).

ClientTel: client's telephone number.

ClientMob: client's mobile or cellular telephone number.

ClientEmail: client's email address.

11.2.3 Company details

This page details your company's contact information. If you filled in this information before your first report (see Section 3.7) then the information is already in place. You can leave this page as it is or edit as required.

The company details appear on the Report Details page of the generated report.

The fields are explained in Section 3.7

11.2.4 Observations

The observations page allows you to create a sequential, annotated report of your survey. Each observation you make can include a position, code, comments, the grade and a photo. Observations appear on the Observation page of the generated report.

The fields offer considerable flexibility and you can populate them with information to suit your work practices. The only exception is the ObsPhoto field, which requires you to select a photo stored on the Compact Flash card.

Observation fields

ObsPosition: record the position of your observation.

ObsCode: assign an observation with a code if used in your work practices.

ObsNotes: record your comments such as a brief description or assessment of the observation.

ObsGrade: grade your observation if required. For example, you could grade an observation by severity of fault.

ObsPhoto: add a screen capture located on the Compact Flash card. The generated report will feature an inline thumbnail of this image.

11.2.5 Photos

With the photos form you can attach annotated photos to the report. Photos appear on the Survey Photos page of the generated report.

Photos fields

PhotoName: select an image file located on the Compact Flash card.

NOTE: When you select a photo, be sure to press the SEL option rather than pressing OK once you've highlighted the desired file.

PhotoCaption: describe the photo with caption text.

11.2.6 Freetext

In each report, you can include a page containing freeform text. This is particularly useful for notes or explanations that do not fit elsewhere in the report. Set your title in the FreeTitle field and then enter your comments in the Body field.

Free text will appear on the final page of the generated report.

Freetext fields

FreeTitle: use this field to give your comments a title. In the report, the title appears as a subheading under the Comments page title.

Body: use this field to write your comments.

11.2.7 Site

The Site Details page allows you to enter information about the site or location that you are surveying. This information appears on the Report Details page of a generated report. This page is useful when your client's office address differs from the survey location, for example when your client is a real estate agent and the survey site is located at a letting property.

Site fields

- SiteContact: name of the principal contact for the site.
- SitePosition: specifies the contact's position: you could enter landlord or receptionist for example.
- SiteAddress: street address of the site under survey.
- SiteTel, SiteMob, SiteEmail: telephone, mobile phone and email of the site if applicable.

11.2.8 Survey

The survey page allows you to enter information about the survey you conduct. On the generated report, this information appears under the Report Details page.

Survey fields

- SurveyDate: date you conducted the survey.
- Surveyor: surveyor's personal or company name.
- SurveyLog: log number if applicable.
- SurveyOurReference: your reference number if applicable.

11.3 Editing and deleting reports

Once you create a report, you can edit or delete it using the Report menu.

The Report menu (REPOR) displays a list of reports included in the current default directory, for example [MyReport].

Select the EDIT option in the menu and the module will load the seven report pages ready for editing.

The steps for editing report pages are identical to writing them as described in Section 11.3.

NOTE: You can export an inspection report to Microsoft Word using FlexiSight, where you can edit that content and layout as required.

Select the DEL option to delete the selected report. If there are multiple reports, highlight each report you wish to delete by pressing the ➤ arrow and press DEL.

11.4 Viewing reports

You can view your reports on your desktop or laptop computer. Generated reports must be viewed on a computer running Microsoft Internet Explorer 6 (IE6) or later. IE6 is standard on computers running Microsoft Windows XP with Service Pack 2.

11.4.1 Folder structure

The report is generated as a series of HTML documents organized into a number of sub-directories that are contained in the main report directory. The principle is similar to that of an internet website. By default, the report folder is stored in the current working directory of the Compact Flash card and is named according to the name you gave the report when you created it, for example 30Nov/MyReport.

Reports are organized as follows:

- [MyReport]: top level report directory, named according to your preference when you created the report.
- [data] directory containing the XML data files,
- [images] directory containing the images you attach to the report,
- [pages] contains individual HTML pages,
- logo.jpg is your company or business logo. You can replace this file as required,
- report.html the main page of the report.

NOTE: Please take care to copy or move the entire report directory to your computer when retrieving the report from the Compact Flash card. The report directory contains multiple subdirectories that are required for viewing and converting the report.

WARNING!

Do not edit the files in the [data] or [pages] directories as this will corrupt the report or render it unreadable to FlexiSight.

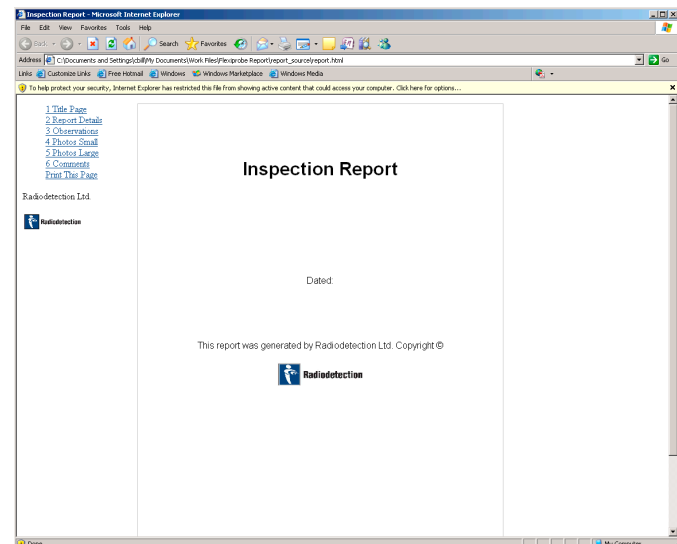


Figure 11.2: Viewing reports in Internet Explorer

To view your report:

1. Connect the command module to your computer using the supplied USB 2.0 cable.
2. Once your computer recognizes the command module, use Windows Explorer to locate the report.
3. You can then copy or move the report folder to your computer or view it directly from the Compact Flash card.
4. Using Windows Explorer locate the **report.html** file in the report folder.
5. Open **report.html** with Internet Explorer.
6. If prompted, allow Active Content by right-clicking the yellow warning bar and select the 'Allow Active Content' option.

The report will load and display the navigation frame on the left and the title page on the right.

Browsing and printing:

To assist navigation, the report is presented in a similar fashion to a web site or a PDF document with bookmarks. The report is divided into two frames.

The navigation frame (Figure 11.3) on the left displays a link to each page and a print link that prints the currently displayed page.

The content frame on the right displays the currently selected report page.

To print a page, select it using the navigation link and then press the Print This Page link on the navigation frame. You must repeat this step for each page of the report.

NOTE: Use the *Print This Page* function rather than using the File -> Print command, otherwise the printed page will also include the navigation frame and be printed in landscape format.



Figure 11.3: Report navigation

11.5 Exporting to Word

FlexiSight is a Windows XP application bundled with the GatorCam Digital+ that allows you edit video and convert reports to Microsoft Word format. This section provides a basic overview of using the report conversion function. For video editing instructions, please consult the FlexiSight help.

FlexiSight converts the inspection report to a single Microsoft Word document. Once converted to Word format, you can edit the report as required.

NOTE: FlexiSight does not overwrite the original report data so if you accidentally delete your text you can re-import the original HTML report and create a Word document version. Radiodetection recommends that you backup all data before converting and editing your report.

Once you convert the report to a Word document, you can save it to any file format your word processor supports.

11.5.1 Conversion requirements

To convert an inspection report to Microsoft Word format, you need the following system requirements.

Microsoft Windows XP with Service Pack 2.

Microsoft Office 97 or later.

FlexiSight 2 or later.

11.5.2 Conversion overview

FlexiSight converts the HTML report to a single document. By default a report has 5 sections, which are detailed as follows:

- Title page: title and date of report.
- Report details: includes Survey, Company, Client and Site details.
- Observations: details the observations you made while in situ. Includes thumbnail images.
- Inspection photos: shows still photos with your captions.
- Comments: freeform text comments written in situ.

Once converted, you can edit and modify any part of the report. This is particularly useful if you need to expand or include new comments and observations or correct any spelling mistakes. You can also change typefaces or styles to reflect your company's house style and position graphics and logos accordingly.

Converting to Microsoft Word format

NOTE: Close all Microsoft Word documents before you begin the conversion process.

1. Connect the command module to your computer using the supplied USB 2.0 cable. See Section 7.
2. Navigate to the directory where your report is located and copy the directory to your computer,
3. Open FlexiSight,
4. Click Report on the menu bar,
5. Use the file browser (Figure 11.4) to select the report directory and click OK.

FlexiSight will create the report as report.doc and save it in the report folder. Locate the file using Windows Explorer and double-click to open in Microsoft Word.

Conversion troubleshooting

FlexiSight will fail when converting from a report directory that contains missing or damaged report data files. Make sure that you copy the whole report directory to your computer before attempting to convert the report.

Do not manually edit report XML data files as this may render the report unreadable to FlexiSight. If you need to amend your report, do so using the command module's report editing feature or edit the converted report using Microsoft Word.

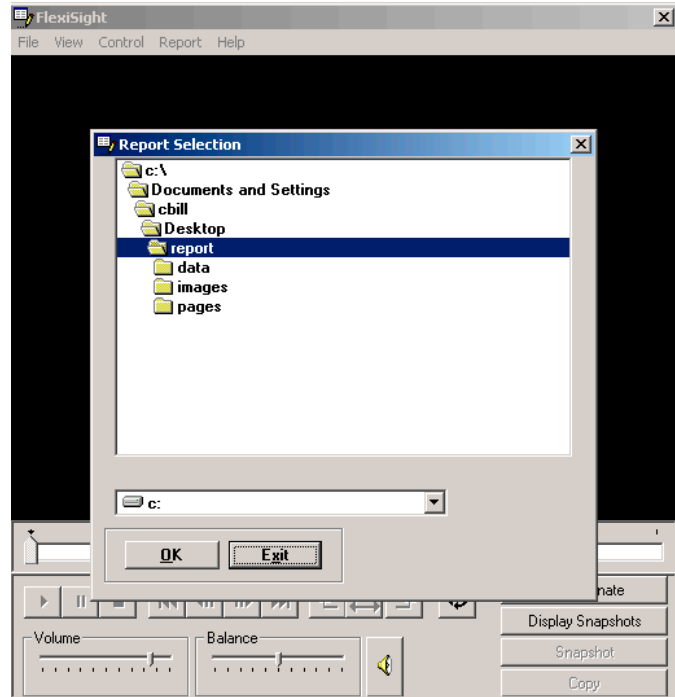


Figure 11.4: FlexiSight report select box

Section 12–Appendix

12.1 Shortcuts

This appendix includes a list of keyboard and keypad shortcuts featured on the command module. Familiarizing yourself with the shortcuts will allow you to work more efficiently.

The following table lists command module keyboard functions that can be activated by pressing the Control (Ctrl) key followed by the specified keyboard key.

NOTE: Some shortcuts may not be available on this model.

Keyboard shortcut	Function
Ctrl + Q	Still Capture
Ctrl + W	Text
Ctrl + T	Focus -
Ctrl + Y	Focus +
Ctrl + U	Rotate reset
Ctrl + I	Rotate Left
Ctrl + O	Rotate Right
Ctrl + A	Play
Ctrl + S	Pause
Ctrl + F	Pan Reset
Ctrl + G	Pan Right
Ctrl + Y	Pan Left
Ctrl + J	Zoom Reset
Ctrl + K	Zoom Left
Ctrl + L	Record
Ctrl + Z	Stop Record
Ctrl + X	Stop Motion
Ctrl + B	Iris -
Ctrl + N	Iris +
Fn + F5	Toggle sonde
F7	- camera brightness
F8	+ camera brightness
F10	Calibrate / Zero
P	Sonde on / off

Keypad shortcut	Function
Fn + F5	Toggle sonde on /off

12.2 Care and maintenance

WARNING!

Clean and sanitize the GatorCam Digital+ system at regular intervals.

There are no user serviceable parts, do not dismantle component parts, unless directed by the manual.

12.2.1 Changing the camera

1. Ensure that the camera is clean and dry.
2. Unscrew the camera from the rod.
3. Ensure that the electrical connections on the end of the rod and the camera are dry and free from contamination.
4. Connect the new camera and fully tighten the connector.
5. Store the removed camera in a clean/dry environment.

12.2.2 Cleaning the system

WARNING!

Foul water systems can be a source of biological hazards.

Command Module

Clean the case with mild soapy water.

Use lint-free cloth to clean the TFT screen.

Camera

Clean by washing with water and disinfectant as required.

Clean the lens with a lint-free cloth.

Rod

Use a cloth moistened with a suitable disinfectant.

12.2.3 Rod seals

When the camera is removed, ensure that the O-ring seals on the rod and sonde connections are not damaged.

12.2.4 Storing the system

Before storing the system ensure the rod, camera and skids, are clean and dry. GatorCam Digital+ is a precision system, store in a clean and dry environment.

12.3 Firmware upgrades

Firmware describes the command module's integrated software. Radiodetection may issue software updates to improve system performance. To find out if Radiodetection has released a new software update, please visit www.radiodetection.com or contact your local Radiodetection representative.

Updating firmware is straightforward. To update your firmware, please observe the following warnings and procedure.

WARNING!

Before attempting to upgrade the firmware ensure you have copied all the firmware files to the root directory of the Compact Flash card.

If using a CF card that contains survey files, be sure to back up the data on to your computer before continuing this procedure.

DO NOT switch off the command module while the upgrade is in progress. Failure to comply may render the command module inoperable.

Radiodetection recommends using the mains adapter for firmware upgrades. This is to ensure a reliable power source.

1. Check for new updates at www.radiodetection.com,
2. Download the update to your computer,
3. Copy the update files to the root directory of your Compact Flash card using the USB interface,
4. Switch on the module,
5. Enter the ULOAD menu (SETUP -> DEVCE -> CONTR -> UPDTE -> ULOAD),
6. The module will now update the firmware and then prompt you to restart the module by pressing OK.

The command module has now been updated.

NOTE: If you receive any error messages, check that you have copied all files to the card and then try again.

12.4 Clamp assembly

Use the GatorCam Digital+ clamp to attach the command module onto the push rod camera reel.

The GatorCam Digital+ clamp is supplied in its assembled state. Figure 11.2 illustrates the clamp in exploded form in place above the reel.




Figure 12.2: Push rod clamp exploded

To install the clamp:

1. Remove the black handle, by rotating anti clockwise. Place safely to one side.
2. Slide washer and collar off the shaft and place safely to one side.
3. Remove the 4 x 6mm bolts using a 5mm Allen key (not supplied) and place safely to one side.
4. Remove end clamp and place safely to one side.
5. Place the clamp unit onto the coiler cross bar, with the threaded shaft lower most and the clamp spigot pointing up wards. Place end clamp to the clamp unit and secure in place using 4 x 6mm bolts.
6. Place the collar, then the washer onto the threaded shaft.
7. Place the black handle back on the threaded shaft until hand tight.
8. The clamp should look like that as shown in Figure 12.3.

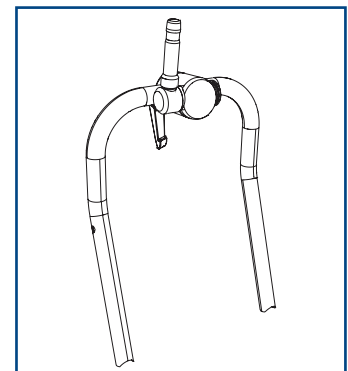


Figure 12.3: Installed push rod clamp

12.5 Creating DVDs

To produce a DVD from a GatorCam Digital+ video you will need to use either a standalone DVD writer with a composite video input or a PC equipped with a DVD writer and the relevant DVD authoring and DVD burning software tools.

Note: Use good quality, branded blank DVDs rather than generic disks.

12.5.1 Standalone DVD writer

Standalone DVD writers are available from a variety of electrical goods retailers. If purchasing one for the purpose of converting GatorCam Digital+ video make sure the unit has a direct composite input.

NOTE: DVD recorders differ significantly according to brand and model. This procedure is intended as a very broad guide only. Refer to your DVD recorder's user manual for instructions on how to record an external video source.

To create a DVD:

1. Select the video file you wish to convert into DVD using the file browser. Do not play the file at this stage.
2. Connect the GatorCam Digital+ video out connector to the DVD writer input using a suitable RCA composite video lead.
3. Insert a blank DVD disk in the DVD writer and begin recording.
4. Play the file on the command module.
5. When the video file is terminated stop the DVD writer and finalize the DVD disc following the DVD recorder's user documentation.

12.5.2 PC DVD Writer

To create a DVD from a GatorCam Digital+ video file you will need to follow a number of steps that will vary depending on the software and hardware installed on your computer. The basic minimum requirements are:

- DVD authoring program,
- USB or internal DVD writer, also known as a DVD burner,
- DVD burning software, such as Nero.

Some DVD authoring tools have DVD burning capabilities. Nero, which is included with many USB and internal DVD writers, includes basic DVD authoring (Nero Visual Express) and burning software (Nero Burning ROM).

In general, the basic purpose of a DVD authoring program is to encode or convert a suitable video file (or files) into a DVD compatible format. The authoring program may generate the DVD menu and titles but this depends on the software package used.

Once the DVD is authored as a DVD compatible file (Mpeg2) or disk image (ISO) you must then use your DVD burning program to create or burn the DVD disk. Packages such as Nero, automate the authoring and burning process using a simple Wizard.

Due to the very large number of commercial and open source DVD authoring and burning programs that are available, a tutorial to cover every program is beyond the scope of this appendix.

For more information consult the documentation that came with your DVD authoring software and burning hardware.

12.6 Specifications

12.6.1 Controller

	GatorCam Digital+ controller
Screen	8" (200mm) industrial TFT
Storage	High Speed Compact Flash
Connectivity	USB, Video in/out, audio, <i>Bluetooth</i> ® (optional)
Environmental	IP55 (closed) IP53 (open)
Power supply	IP67 rated for outdoor use
Dimensions	360 x 360 x 200mm (14" x 14" x 8")
Weight	5.5Kg (12lbs)

12.6.2 Standards

Vibration	BL EN 60068-2-6
Bump	BS EB 60068-2-29
Safety	EN 61010-1 / UL 61010-1 / CAN/CSA 61010-1 EMC - FCC CFR 47 / EN 61000-6-4

America

Radiodetection

154 Portland Road
Bridgton, ME 04009, USA
Tel: +1 (207) 647 9495
Toll Free: +1 (877) 247 3797
Fax: +1 (207) 647 9496
Email: bridgton@radiodetection.spx.com

Pearpoint

72055 Corporate Way
Thousand Palms CA 92276, USA
Tel: +1 800 688 8094
Tel: +1 760 343 7350
Fax: +1 760 343 7351
Email: pearpoint@radiodetection.spx.com

Radiodetection (Canada)

Unit 34, 344 Edgeley Blvd.
Concord, Ontario, Canada L4K 4B7
Tel: +1 (905) 660 9995
Toll Free: +1 (800) 665 7953
Fax: +1 (905) 660 9579
Email: support@radiodetection.ca

Europe

Radiodetection (UK)

Western Drive
Bristol BS14 0AF, UK
Tel: +44 (0) 117 976 7776
Fax: +44 (0) 117 976 7775
Email: sales.uk@radiodetection.spx.com

Radiodetection (France)

13 Grande Rue, 76220
Neuf Marché, France
Tel: +33 (0) 232 8993 60
Fax: +33 (0) 235 9095 58
Email: infos@radiodetection.com

Radiodetection (Benelux)

Industriestraat 11, NL 7041
GD's-Heerenberg, Netherlands
Tel: +31 (0) 314 66 47 00
Fax: +31 (0) 314 66 41 30
Email: info@radiodetection.nl

Radiodetection (Germany)

Groendahlscher Weg 118
D-46446 Emmerich am Rhein, Germany
Tel: +49 (0) 28 51 92 37 20
Fax: +49 (0) 28 51 92 37 520
E-Mail: info@radiodetection.de

Asia-Pacific

Radiodetection (Asia-Pacific)

Room 708, CC Wu Building
302-308 Hennessy Road, Wan Chai
Hong Kong SAR, China
Tel: +852 2110 8160
Fax: +852 2110 9681
Email: chinasales@radiodetection.spx.com

Radiodetection (China)

Hong Fu Group Office Building Room 322-326
Bei Qi Jia Township, Changping District
Beijing 102209, China
Tel: +86 (0) 10 8975 5540
Fax: +86 (0) 10 8975 5640
Email: china.service@radiodetection.spx.com

Radiodetection (Australia)

Mactek Pty. Ltd

Unit 14, 5-7 Prosperity Parade
Warriewood NSW 2102, Australia
Tel: +61 (0) 2 9979 8555
Fax: +61 (0) 2 9979 7733
Email: mactek@mactek.com.au

To see the full range of products and
services provided by Radiodetection visit:

www.radiodetection.com

Radiodetection products are under continuous development and are subject to change, we reserve the right to alter or amend any published specification without notice.

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Radiodetection Ltd is under licence. GatorCam Digital+ is a Trademark owned by Radiodetection.

Copyright 2007 Radiodetection Limited. All rights reserved. Radiodetection Ltd. is a subsidiary of SPX Corporation.



Radiodetection